
Typical construction compound



- 1. Cabin Layout and number of welfare facilities to be assessed by Contractor.
- 2. Compound installation is temporary for duration of project. Upon Project completion compound area will be fully re-instated.
- 3. Foul and surface water drainage treatment to be determined through detailed design.
- 4. Compound area should be completed with compact aggregate, depth to be decided on ground conditions. Aggregate will be underlayed with geo-textile matting.
- 5. Location of COSHH Storage to be agreed and will include appropriate pollution prevention
- 6. Not to scale

Legend:

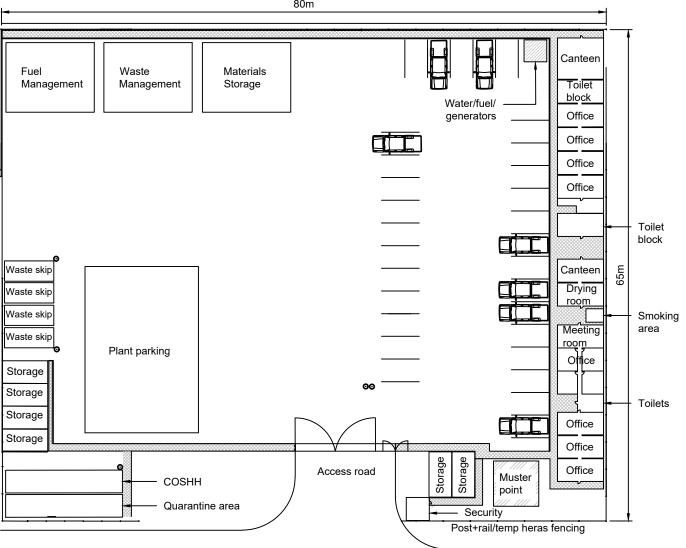

www.slrconsulting.com



CARN FEARNA WIND FARM ENVIRONMENTAL IMPACT ASSESSMENT

Figure Title
INDICATIVE CONSTRUCTION COMPOUND

NTS @ A3		402.064563.00001.0008	
Designed	SRB	Checked RA	Authorised DK
Date	Date 06/12/24	Date 06/12/24	Date 06/12/24
Figure Number 3.5			Rev.